

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093198 A3

(51) International Patent Classification⁷: **E06B 9/323**, 9/64

(21) International Application Number:
PCT/EP2005/003753

(22) International Filing Date: 17 March 2005 (17.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1025790 22 March 2004 (22.03.2004) NL
1028053 18 January 2005 (18.01.2005) NL

(71) Applicant and

(72) Inventor: **ROETGERING, Grit** [NL/NL]; Goorseweg
27, NL-7468 SH Enter (NL).

(74) Agent: **SCHUMANN, Bernard, Herman, Johan**; Schu-
mann Patent Consultancy B.V., Kerkedennen 43, NL-7621
EB Borne (NL).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
9 March 2006

[Continued on next page]

(54) Title: PROFILED BAR WITH A RAISING MECHANISM FOR A WINDOW OR DOOR COVERING

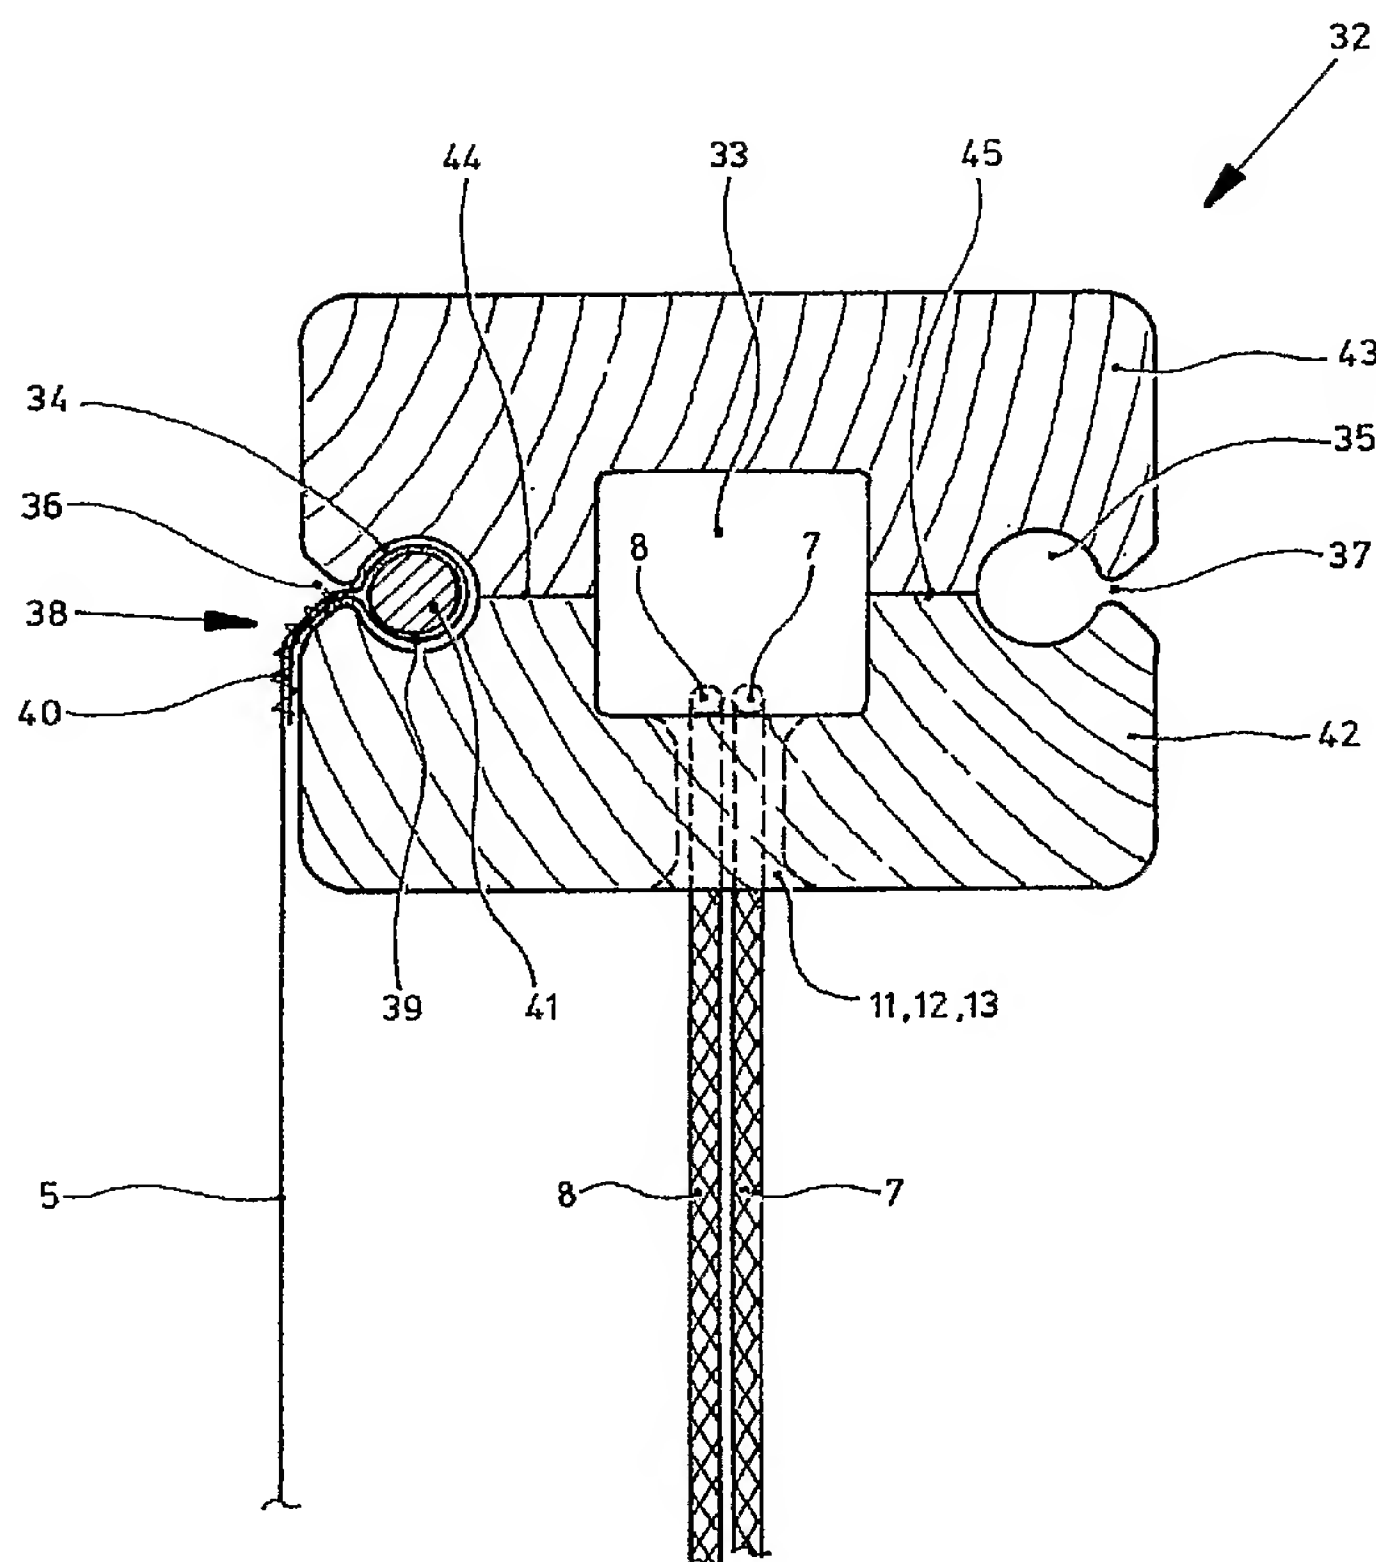

(57) Abstract: A bar intended for fixing to the
topside of a window or door comprises: a first
cavity for accommodating a raising mechanism
for raising cords for a covering for the window,
which internal cavity is accessible from outside
via holes in the bar for passage of a control cord
and at least two cords which are connected for
driving to the underside of the covering; a sec-
ond cavity which extends in the longitudinal di-
rection and which debouches via a constriction
onto the outside of the bar, and serves to receive
the upper edge of the covering which fits into the
second cavity but is too wide to pass through the
constriction; two profiles which together bound
the first cavity, in at least one of which profiles
said holes are present.

WO 2005/093198 A3



(48) Date of publication of this corrected version:

20 April 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 16/2006 of 20 April 2006